


# CoBond PC Trowelable

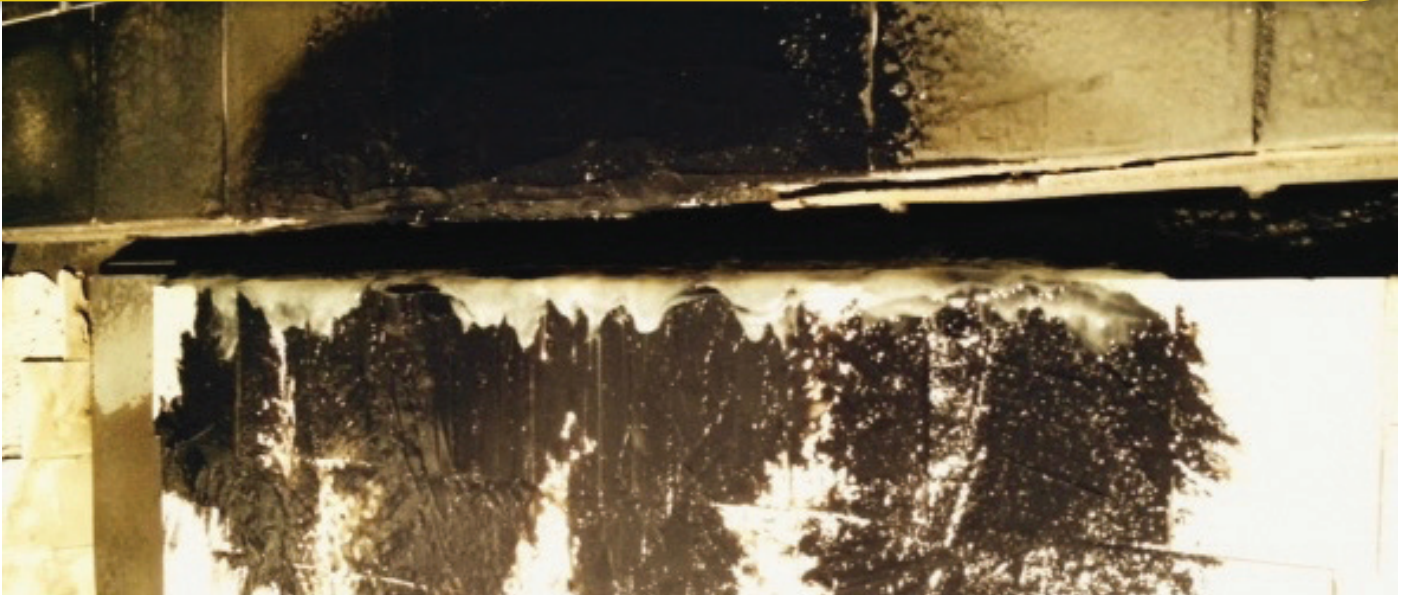

PC Trowelable is a two-part ambient temperature curing 100% solids polyurethane compound.

When the two components are mixed, a paste is formed which can be applied to a variety of surfaces. The thickness of the paste allows for high build (up to 30mm) on vertical surfaces without sagging or to the underside of horizontal surfaces without falling off. The mixture can be worked with ease using a trowel or scraper.

This product can be used for repair on worn equipment or provides excellent wear resistance to new equipment. With the use of the appropriate substrate primer and surface preparation, an engineering grade bond can be achieved.

## KEY FEATURES:

- Excellent for repairing and lining chutes, pulley lagging, hoppers and screens
- High build up on vertical surfaces, 20-30mm
- Excellent wear strength
- 100% solids polyurethane

## PROPERTIES

Colour – Black

Hardness – 80-85A

Shrinkage – <1%

Shelf life – 12 months @ 22°C

Pot life – 20 minutes @ 24°C

Cure time – 6 hours @ 24°C



## PRODUCT CODES:

1kg – PC Trowelable: CBPC-1000

4kg – PC Trowelable: CBPC-4000

CoBond Material Solutions is an Australian company. CoBond is challenging the way things are done and delivering innovative and cost-effective products and solutions to overcome excessive wear while reducing downtime and increasing productivity.

For more information on any of our products please contact us on:

PO Box 2291 Dangar NSW 2309

E: [info@cobond.com.au](mailto:info@cobond.com.au)

[www.cobond.com.au](http://www.cobond.com.au)